


specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	DETENT TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	kg.cm	kg.cm	g.cm ²	Kg
	4	1.8	3.4	2.0	1.7	2.5	8.8	0.4	300	0.7

Wiring Diagram:

A:BLK
 A:BLK/WHT
 C:GRN/WHT
 C:GRN
 B:RED
 B:RED/WHT
 D:BLU/WHT
 D:BLU




FULL STEP,PARALLEL BIPOLAR

CW DIRECTION	STEP	A	C	B	D
↓	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW ,VIEW FROM FRONT SHAFT END

* start of the coil

Info on Label 1:


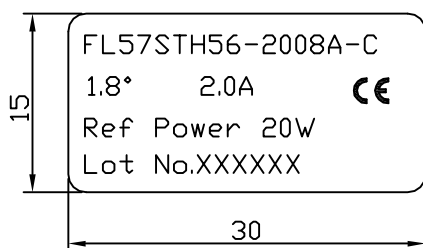


Info on Label 2:



PIN #	LEADERS
PIN 1	BLK
PIN 2	GRN/WHT
PIN 3	BLK/WHT
PIN 4	GRN
PIN 5	RED
PIN 6	BLU/WHT
PIN 7	RED/WHT
PIN 8	BLU

Dimension:

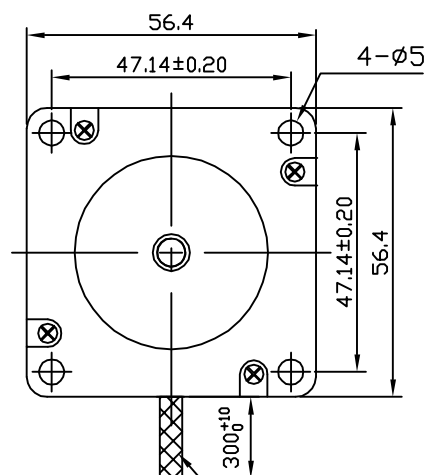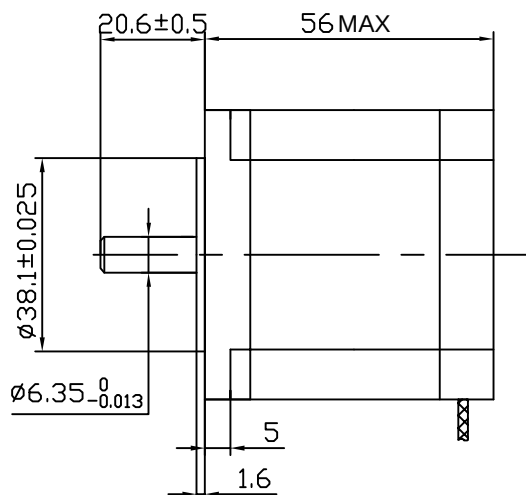

BLACK END CAP
 注：黑色端盖

JST XHP-8
 CONTACT: SXH-001T-P0.6
 AWG22# UL1430

REV	ECN NO.	DESCRIPTION	DRN	APP'D	DATE	DESIGN	DATE	P/N.
UNLESS OTHERWISE SPECIFIED TOLERANCES:						CHECK		TITLE: SPECIFICATION
DECIMALS: .X ±0.5						APP'D		USED ON: FL57STH56-2008A-C
ANGULAR: .XX ±0.25								DWG NO. FX3.162. JS
.XXX ±0.1						SCALE		REV
UNIT: mm						SHEET	OF	FULLING MOTOR
DO NOT SCALE DRAWING								