

specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	DETENT TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.cm	N.cm	g.cm ²	Kg
	2	1.8	3.2	4	0.8	3.2	220	6.8	520	1.1

Wiring Diagram:

CW DIRECTION	STEP	A	C	B	D
	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW see from the flange side

Dimension:

					DESIGN	DATE	P/N.
REV	ECN NO.	DESCRIPTION	DRN	APP'D	DATE		
UNLESS OTHERWISE SPECIFIED TOLERANCES: DECIMALS: .x ±0.5 .xx ±0.25 .xxx ±0.1 UNIT: mm DO NOT SCALE DRAWING		MATERIAL			CHECK		TITLE : SPECIFICATION
					APPD		USED ON: FL57STH84-4004A
							DWG NO. FX3.162.
							JS
		THIRD ANGLE PROJECTION 			SCALE		FULLING MOTOR
					SHEET	OF	

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	DETENT TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.cm	N.cm	g.cm ²	Kg
	2	1.8	3.2	4	0.8	3.2	220	6.8	520	1.1

specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	DETENT TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.cm	N.cm	g.cm ²	Kg
	2	1.8	3.2	4	0.8	3.2	220	6.8	520	1.1

Wiring Diagram:

BLK A

GRN C

RED B

BLU D

M

CW DIRECTION	STEP	A	C	B	D
↓	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW see from the flange side

Dimension:

20±1

1.6

5

84

Ø38.1±0.05

Ø8.0_{0-0.013}

AWG22# UL1430

400Min

56.4


47.14±0.20

4-Ø5

47.14±0.20

56.4

						DESIGN	DATE	P/N.		
REV	ECN NO.	DESCRIPTION	DRN	APP'D	DATE			TITLE : SPECIFICATION		
		UNLESS OTHERWISE SPECIFIED TOLERANCES: DECIMALS: ANGULAR: .x ±0.5 ±0°30` .xx ±0.25 .xxx ±0.1 UNIT: mm DO NOT SCALE DRAWING	MATERIAL			CHECK		USED ON: FL57STH84-4004A		
						APPD		DWG NO. FX3.162.	JS	REV
						THIRD ANGLE PROJECTION		SCALE		FULLING MOTOR
				SHEET OF						

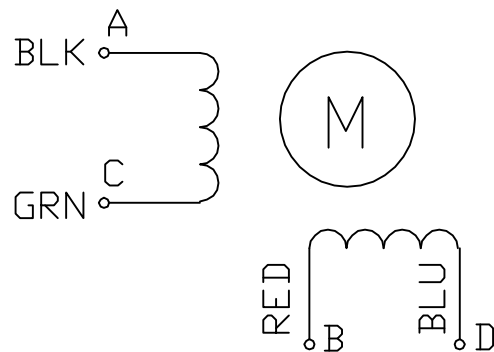

CW DIRECTION	STEP	A	C	B	D
	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW see from the flange side

specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	DETENT TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	N.cm	N.cm	g.cm ²	Kg
	2	1.8	3.2	4	0.8	3.2	220	6.8	520	1.1


Wiring Diagram:


CW DIRECTION	STEP	A	C	B	D
	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW see from the flange side

Dimension:

DESIGN	DATE	P/N.
REV	ECN NO.	DESCRIPTION
DRN	APP'D	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES:		TITLE : SPECIFICATION
DECIMALS: .x ±0.5		USED ON: FL57STH84-4004A
ANGULAR: .xx ±0.25 ±0°30'		DWG NO. FX3.162.
.xxx ±0.1		JS
UNIT: mm		REV
DO NOT SCALE DRAWING		FULLING MOTOR
MATERIAL		CHECK
THIRD ANGLE PROJECTION		APPD
		SCALE
		SHEET OF

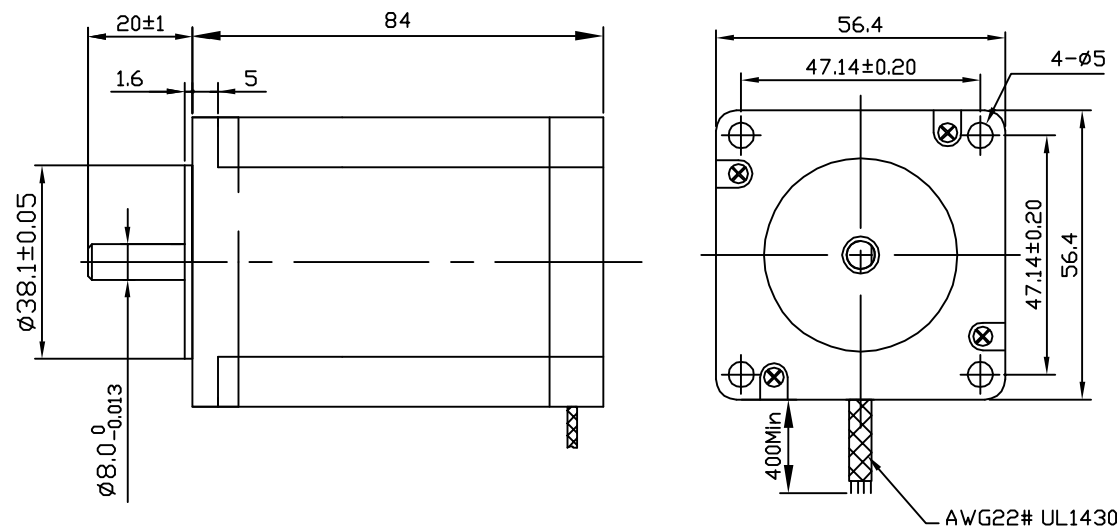

						DESIGN	DATE	P/N.	
REV	ECN NO.	DESCRIPTION		DRN	APP'D	DATE		TITLE : SPECIFICATION	
UNLESS OTHERWISE SPECIFIED TOLERANCES:		MATERIAL				CHECK		USED ON:	
DECIMALS: ANGULAR:						APPD		FL57STH84-4004A	
.X ±0.5 ±0°30'								DWG NO. REV	
.xx ±0.25		THIRD ANGLE PROJECTION 						FX3.162. JS	
.xxx ±0.1						SCALE		FULLING MOTOR	
UNIT: mm						SHEET OF			
DO NOT SCALE DRAWING									