


specifications:

MODEL	PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	ROTOR INERTIA	WEIGHT
		DEG/STEP	V	A	ohms	mH	g.cm	g.cm ²	Kg
	2	1.8	8.83	1.0	8.83	20.9	8000	102	0.5

Wiring Diagram:


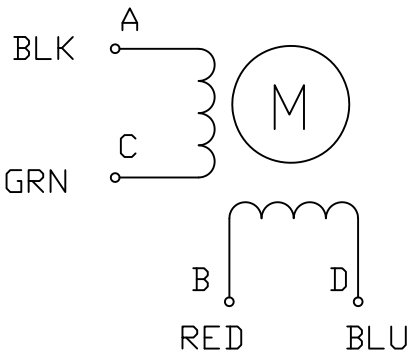


Rotation:

CW DIRECTION	STEP	A	C	B	D
	1	+		+	
	2		+	+	
	3		+		+
	4	+			+
	1	+		+	

CW direction,see from the flange side

Dimension:

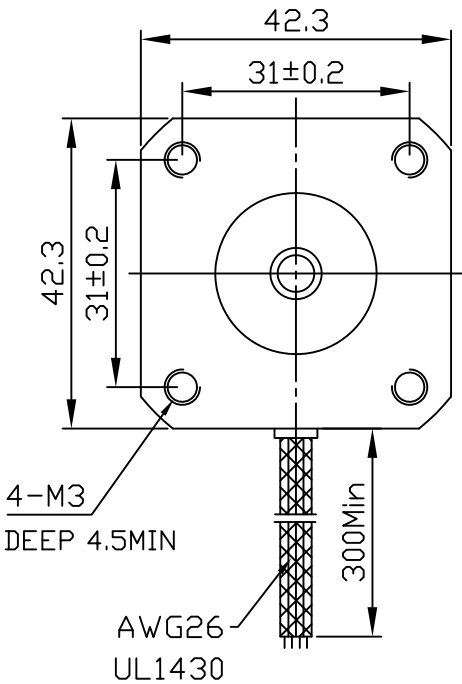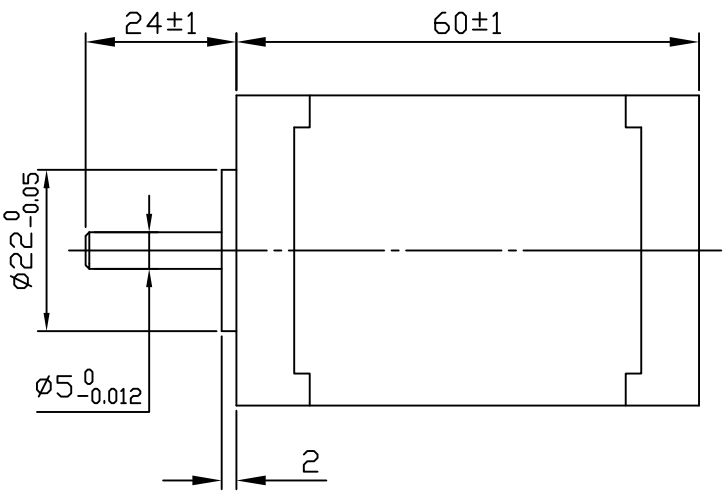

					DESIGN	DATE	P/N.	
REV	ECN NO.	DESCRIPTION	DRN	APP'D	DATE	2015.02.10	FL42STH60-1004A	
UNLESS OTHERWISE SPECIFIED TOLERANCES: DECIMALS: ANGULAR: .x ±0.5 ±0°30' .xx ±0.25 .xxx ±0.1 UNIT: mm DO NOT SCALE DRAWING			MATERIAL		CHECK		TITLE : SPECIFICATION	
					APPD		USED ON: MT17FP24010M4	
							DWG NO. REV	
							FX3.162. JS	
			FIRST ANGLE PROJECTION 		SCALE		FULLING MOTOR	
					SHEET OF			